




LIFE SAFETY & INCIDENT MANAGEMENT

Intelligent Audio Amplifiers

SIGA-AA30, SIGA-AA50

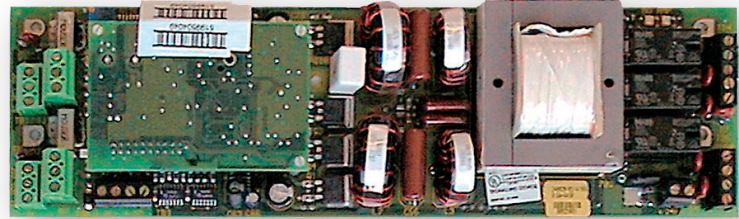

Overview

SIGA amplifiers are high-efficiency switch-mode audio amplifiers available in 30- and 50-watt sizes. Amplifiers have two input channels supporting dual-channel or single-channel audio applications. Amplifier project application flexibility is enhanced by provision for input levels at 1Vrms or 25Vrms. This allows SIGA amplifiers to obtain their input from a line level signal or the output of another 25Vrms amplifier. This feature provides great application flexibility helping meet project requirements. Input channel selection is made through system software programming transmitted to the amplifier via a Signature data circuit. This reduces wiring-interconnect requirements by reducing the number of control modules needed.

Each amplifier has provision for connecting backup amplification. Amplifiers can be backed up one-to-one or multiple amplifiers can have one shared backup amplifier. In addition to backup amplifiers each SIGA amplifier has an onboard 1kHz tone generator that can activate in the event of input failure or if no backup amplifier is available.

Engineering Specification

System remote amplifiers must communicate their status directly to the main control panel. External monitoring is not acceptable. Each amplifier must support dual-channel audio. Amplifiers must support input signals at line a built-in backup 1kHz tone generator that automatically activates with loss of input signal. Each amplifier must have provision for a backup amplifier. It must be possible to default to backup tone or standby amplifier in the event of the loss of input signals.

Standard Features

- Remote or Local mounting
- Two-channel input
- Connects to signature data circuit. Allows switching between two channels without additional control modules. Eliminates the need for additional amplifier monitoring.
- Output selectable as 25Vrms or 70Vrms
- Dual-input level allows the use of a 1Volt or 25Volt input signal
- Backup amplifier connection
- Backup 1kHz tone generator

Application

Signature amplifiers are ideally suited for distributed audio applications and small centrally banked applications. The audio output is configurable as 25Vrms or 70Vrms in Class B or Class A wiring configurations. Speakers can connect directly to the output of the amplifier or the amplifier output can run as an audio riser to signature modules where speaker zone selection is made. Each amplifier has a built-in 1kHz tone generator and provision for a backup amplifier. Should an amplifier lose its input signal, the output will switch to a backup amplifier. If there is no backup amplifier or the output from the backup is unavailable the output will receive the internal 1kHz tone as the evacuation signal. Onboard status LEDs provide quick visual indication of amplifier status, including Power Amp, Enabled, Backup Mode, Amplifier Active, and Normal Communications.



LIFE SAFETY & INCIDENT MANAGEMENT


Contact us

Phone: 800-655-4497 (Option 4)
 Email: edwards.fire@carrier.com
 Website: edwardsfiresafety.com

8985 Town Center Pkwy
 Bradenton, FL 34202

©2023 Carrier.
 All rights reserved.

Typical Wiring

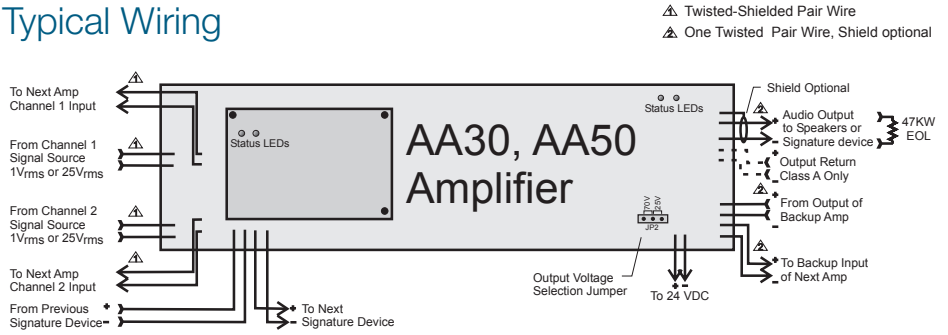

Specifications

Catalog Number	SIGA-AA30	SIGA-AA50
Current: Standby	2 mA at 24 V	2 mA at 24 V
Active	1.55 A at 24 V load	2.8 A at 24 V full load
Output	30 watts @ 25 VRMS or 70 VRMS	50 watts @ 25 VRMS or 70 VRMS
Voltage	24 VDC	
Ground fault impedance	0.1 Ω or less	
Frequency response	ULC: 400 Hz to 4 kHz at -3 dB. ULL: 800 Hz to 2.8 kHz	
Harmonic distortion	< 5%	
Input		
Channel 1 dual input	1 VRMS or 25 VRMS maximum	
Channel 2 dual input	1 VRMS or 25 VRMS maximum	
Configuration	Class B (Style Y) or Class A (Style Z)	
EOL resistor	47 kΩ	
Compatible enclosures	APS6A, APS10A.	
Compatible power sources	System power, BPS6A/10A, APS6A/10A	
Signature Data Circuit		
Addresses	2 module addresses	
Emulation	Signature series CC2 module	
Maximum wire size	12 to 18 AWG (0.75 to 2.5 mm ²)	
Backup tone	1 kHz	
Operating environment	Temperature: 32 to 120°F (0 to 49°C). Humidity: 0 to 93%, N.C.	

Ordering Information

Catalog Number	Description	Ship Wt. lb. (kg)
SIGA-AA30	30 Watt Intelligent Audio Amplifier	2 (.9)
SIGA-AA50	50 Watt Intelligent Audio Amplifier	2 (.9)
Wallboxes		
APS6A	6.5 Amp Auxiliary Power Supply with space for up to two amplifiers.	26 (11.8)
APS10A	10 Amp Auxiliary Power Supply with space for up to two amplifiers.	